

R E M A R K S

Claims 7-19 are presented for examination.

By this amendment, the translation of the specification has been amended to insert headings, to correct grammatical and typographical errors and, in particular, to add portions of the original page 5 of the PCT Application, which was inadvertently not included with the amended sheets attached to the Preliminary Examination Report of January 21, 2002. These amendments are incorporated in the attached Substitute Specification. A marked-up version is attached herewith as an Appendix showing the changes which are being requested.

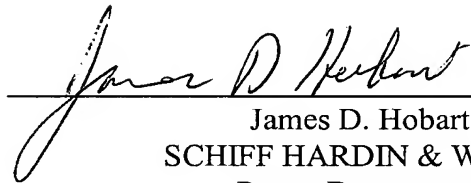
The Abstract of the Disclosure has been replaced by the attached unnumbered page containing an Abstract of the Disclosure. This Abstract has been revised to overcome any possibilities of reciting claim-type terminology. A marked-up version of the original Abstract of the Disclosure is also attached in the Appendix.

Claims 1-6 from the annex have been cancelled, without prejudice, and new claims 7-19, which are basically claims 1-6 which have been drafted to place them in form for examination in the United States Patent Office and to remove multiple-

10088668 " 032002
20020103888001

dependency, have been added. It is respectfully submitted that the claims are patentable over the references of record and are allowable.

Respectfully submitted,

 (Reg. No. 24,149)

James D. Hobart
SCHIFF HARDIN & WAITE
Patent Department
6600 Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606
Telephone: (312) 258-5781
Customer Number 26574

DATED: March 20, 2002

1003668-0320020208

22-10-2001
1999P02872 WO

- 1 -

Description

TITLE

Optical transmission system

Background of the Invention

- 5 The invention relates to an optical transmission system comprising a fixed number of optical fiber line sections of virtually the same length with ~~in~~ each ^{section} ~~case~~ including an optical fiber and a dispersion compensation unit.
- 10 Owing to the chromatic dispersion occurring during the transmission of optical signals over optical fibers, and to the self-phase modulation (SPM), distortions are caused in the optical data signal to be transmitted ~~X~~
- 15 ^{see} In this regard ^{Please See} ~~^~~ Grau and Freude: "Optische Nachrichtentechnik - Eine Einführung" ["Optical communications - an introduction"], Springer-Verlag, 3rd Edition, 1991, pages 120-126 ~~X~~ in the case of all optical transmission systems with high data throughput rates, ^{and} ~~thus~~ also in the case of transmission systems
- 20 operating using the WDM (Wavelength-Division Multiplexing) principle. ~~X~~

- Such distortions in the optical data signal to be transmitted are functions, inter alia, of the input
- 25 power of the optical data signal. Moreover, such distortions determine the regeneration-free transmission range of an optical transmission system, that is to say the optical transmission link over which an optical data signal can be transmitted without the
- 30 need to carry out a regeneration or "3R generation" (electronic data regeneration with regard to the amplitude, edge and the clock pulse of an optically transmitted, digital data signal or data stream).
- 35 In order to compensate such distortions in the optical data signal, ^a provision is made for suitable dispersion compensation units during the transmission of optical

AMENDED SHEET

MARKED-UP
VERSION

10088658-032002

22-10-2001
1999P02872 WO

DE0003256

- 1a -

signals via optical standard monomode fibers, or use is
made of a dispersion management adapted to the optical

10088658.032002
2002E0" 899883001

AMENDED SHEET

MARKED-UP
VERSION

- 2 -

transmission link. For this purpose, such optical transmission systems are subdivided chiefly into a plurality of optical fiber line sections in which the fiber dispersion respectively caused in the optical
5 fiber line section ~~considered~~ is completely or partially compensated with the aid of a dispersion compensation unit.

Such dispersion compensation units are configured, for
10 example, as optical special fibers in the case of which the dispersion or fiber dispersion assumes very high negative values particularly in the 1550 nm window owing to a special selection of the refractive index profile in the fiber core and the surrounding cladding
15 layers of the optical fiber. The dispersion contributions generated by the optical transmission fibers can be effectively compensated with the aid of the high negative dispersion values caused by the dispersion-compensating fiber. In addition, the maximum
20 number of optical fiber line sections or the regeneration-free range of the optical transmission system is determined by the eye diagram (eye-opening) of the optical data signal present at the output of the respective optical fiber line section. This results in
25 a maximum range for a regeneration-free transmission of an optical data signal, which is determined in addition by the optical signal-to-noise ratio of the transmission medium.

30 In optical transmission systems implemented to date, various dispersion management concepts are pursued for this purpose, the optimum dispersion compensation of an optical transmission link being carried out by using pre- and/or post-compensated optical fiber line
35 sections or differently over- or under-compensated ones. It is therefore possible to transmit over a

AMENDED SHEET

MARKED-UP
VERSION

1008866 032002

- 2a -

specific distance without regeneration depending on the
fiber dispersion.

It is known in this regard from DER FERMELDE-INGENIEUR:

- 5 "Wellenlängenmultiplextechnik in zukünftigen
photonischen

10088658.032002

AMENDED SHEET

MARKED-UP
VERSION

Netzen" ["Wavelength division multiplex technology in future photonic networks"], A. Ehrhardt et al., 53rd Volume, Issues 5 and 6, May/June 1999, pages 18-24 that the system optimum for dispersion compensation of an optical transmission system can be reached for a dispersion compensation of less than 100%. It also emerges from the above-named printed publication that the chromatic fiber dispersion can be compensated to a specific proportion by fiber nonlinearities themselves.

10

Also known from the publication "320-Gb/s (32*10 Gb/s WDM) Transmission Over 500 km of Conventional Single-Mode Fiber with 125-km Amplifier Spacing" by Bigo et al., IEEE Photonics Technology Letters, Vol. 10, No. 7, July 1998 is an optical transmission system that comprises a plurality of optical fiber line sections of virtually the same length with in each case an optical fiber (SMF) and a dispersion compensating fiber (DCF). In order to increase the transmission range of 32 optical 10 Gb/s signals, a specific dispersion overcompensation is carried out at the start of the optical transmission link, and in each case a dispersion overcompensation is carried out at the end in each case of an optical fiber line section with the aid of dispersion compensating fibers.

25

Summary of the Invention

The object of the present invention is thus to configure an optical transmission system of the type mentioned at the beginning in such a way that the dispersion compensation is improved and/or the transmission range reduced by the signal distortions and capable of being bridged without regeneration is increased. ~~The object is achieved starting from the features specified in the preamble of patent claim 1 by means of the characterizing features of the latter.~~

35

According to the invention, the object is achieved by means of an optical transmission system ~~in the case of which~~ ^{having} the dispersion compensation units ~~have~~ virtually the same compensation values, which are determined starting from a calculated or estimated accumulated

having a fixed number of optical fiber line
sections of virtually the same length with
each section having an optical fiber and
a dispersion compensation unit with

Introduction

**MARKED-UP
VERSION**

- 4 -

residual dispersion for the at least virtually
uniformly distributed undercompensation of the fiber
dispersion of the fixed number of optical fiber line
sections. By comparison with previous systems with full
5 compensation, the virtually uniformly distributed under
compensation according to the invention over the
individual optical fiber line sections advantageously
permits a virtual doubling of the transmission range
that can be bridged without regeneration, that is to
10 say under compensation is performed in the respective
fiber line sections to such an extent that the
remaining residual dispersion corresponds to a multiple
of the absolute-magnitude dispersion according to the
invention, ^{and that} the residual dispersion along the optical
15 transmission link ^{increases} ~~increasing~~ per fiber line section by
the absolute-magnitude dispersion in each case.

According to a further refinement of the invention, the
optical transmission system has an accumulated residual
20 dispersion that is caused by fiber nonlinearities and
the fiber dispersion and decreases virtually linearly
with increasing data rate. The non linear effect of
self-phase modulation and the group velocity dispersion
(GVD) are the cause of the accumulated residual
25 dispersion at the end of the last fiber line section of
the optical transmission link. In the case of fully
compensated fiber line sections, they are virtually
independent of the input power of the optical data
signal, and influence one another mutually, that is to
30 say the self-phase modulation can have a dispersion-
compensating effect. Moreover, the group velocity
dispersion in the optical fibers increases with
increasing data rate, while the self-phase modulation
remains virtually unchanged. Consequently, the self-
35 phase modulation (SPM) in the optical transmission

AMENDED SHEET

MARKED-UP
VERSION

10088668-032002

- 4a -

system contributes to the dispersion compensation ^{with} the
dispersion compensating effect of the self-phase
modulation (SPM) becoming less with increasing data
rate with regard to the group velocity dispersion, that
5 is to say the accumulated residual dispersion decreases
with increasing data rate.

20020103 032002

AMENDED SHEET

MARKED-UP
VERSION

In accordance with a further refinement of the invention, the dispersion compensation units are provided for compensating the fiber dispersion of all the optical fiber line sections ~~claim 2~~. The maximum
5 transmission range that can be bridged without regeneration can be implemented, if the residual dispersion advantageously increases in each case virtually uniformly by the same dispersion contribution in all the fiber line sections of the optical
10 transmission system.

All the optical fiber line sections are the optical transmission are advantageously of virtually the same length, the optical fibers of the fiber line section
15 additionally having a minimum length of 20 km. ~~claim 5~~. In the case of a minimum length of approximately 20 kilo meters, the signal distortions caused by the fiber dispersion and the fiber non linearities are virtually at their maximum value. Owing to the
20 splitting of the optical transmission system to optical fiber line sections of virtually the same length and whose number is determined by the optical transmission link to be bridged without regeneration and by the accumulated residual dispersion, an optical
25 transmission system that is optimized with regard to the dispersion compensation and the transmission range that can be bridged without regeneration can be implemented by means of a simple modular design. In particular, the optical transmission system can
30 especially advantageously be implemented a bidirectional data transmission over the fiber line sections owing to the symmetrical design ^{being} produced, ~~thereby claim 6~~
35 Advantageous developments and refinements of the optical transmission system according to the invention are described in the further patent claims.

AMENDED SHEET

MARKED-UP
VERSION

20020808-032002

Advantageous developments and refinements of the optical transmission system according to the invention are described in the further patent claims.

~~wings:~~ Brief Description of the ~~Prater~~ Drawings

Figure 2 shows a graph of the dispersion management scheme according to the invention, and

Figure 3 shows, in a further graph, the number of the compensated ^{fiber spans or} fiber line ^{spans or} sections that can be bridged without regeneration, as a function of the distribution of under- or over-compensation.

Description of the preferred characteristics

MARKED-UP
VERSION

Grad. Y.

Ad

Figure 1 is a schematic of an optical transmission system OTS that has an optical transmitter TU and an optical receiver RU. The optical transmitter TU is connected via N optical fiber line sections FDS_1 to FDS_N , each having an input I and an output E, to the optical receiver

MARKED-UP
VERSION

MARKED-UP
VERSION

200200-032003

RU, which in each case have an optical amplifier EDFA, an optical fiber SSMF and an optical dispersion compensation unit DCU.

- 5 A first and Nth optical fiber line section FDS_1 , FDS_N are illustrated in Figure 1 by way of example, a second to N-1th fiber line section FDS_2 to FDS_{N-1} being indicated with the aid of a dotted line. Moreover, the first optical fiber line section FDS_1 comprises a first
- 10 optical amplifier $EDFA_1$, a first optical fiber $SSMF_1$, for example an optical standard single mode fiber, and a first optical dispersion compensation unit DCU_1 , it being possible also to provide an optical preamplifier - not illustrated in Figure 1 - between the first
- 15 optical fiber $SSMF_1$ and the first optical dispersion compensation unit DCU_1 . Similarly, the Nth optical fiber line section FDS_N has an Nth optical amplifier $EDFA_N$, an Nth optical fiber $SSMF_N$ and an Nth optical dispersion compensation unit DCU_N . In a similar way, it
- 20 is also possible here to provide a further optical preamplifier - not illustrated in Figure 1 - between the Nth optical fiber $SSMF_N$ and the Nth optical dispersion compensation unit DCU_N .
- 25 The optical data signal of the optical data stream OS is transferred by the optical transmitter ^{Tx} to the input I of the first optical fiber line section FDS_1 . Inside the first optical fiber line section FDS_1 , the optical data signal OS is amplified with the aid of the
- 30 first optical amplifier $EDFA_1$ and transmitted to the first dispersion compensation unit DCU_1 via the first optical fiber $SSMF_1$. The signal distortions in the optical data signal OS caused by the optical transmission over the first optical fiber $SSMF_1$ are
- 35 compensated in the first dispersion compensation unit DCU_1 except for a first residual dispersion D_{rest1} , which corresponds to the absolute-magnitude dispersion ΔD according to the invention in the case of the first dispersion compensation

MARKED-UP
VERSION

10088668.032000

unit DCU_1 . The fixed residual dispersion D_{rest} is a fraction, fixed by the number N of the optical fiber line sections FDS , of the accumulated residual dispersion D_{akk} , which rises virtually uniformly with
 5 each compensated fiber line section FDS by virtually the same absolute-magnitude dispersion ΔD .

The accumulated residual dispersion D_{akk} is caused by the fiber nonlinearities and the fiber dispersion, and
 10 is present at the end of the N th fiber line section FDS_N . Moreover, the accumulated residual dispersion D_{akk} is not compensated at the end of the N th fiber line section FDS_N because of the parameters, required for recovering the data from the optical data signal OS ,
 15 for the eye diagram $\sqrt{2}$ eye opening¹. The optical data signal OS present at the output E of the first optical fiber line section FDS_1 is therefore not completely compensated for dispersion, but undercompensated.

20 In a similar way to this, the optical data signal OS is transmitted over the further optical fiber line sections FDS to the input I of the N th optical fiber line section FDS_N . The optical data signal OS present at the input I of the N th optical fiber line section
 25 FDS_N is amplified with the aid of the N th optical amplifier $EDFA_N$, and transferred to the N th dispersion compensation unit DCU_N via the N th optical fiber $SSMF_N$. The fiber dispersion, caused by the N th optical fiber $SSMF_N$, of the optical data signal OS is partially
 30 compensated in the N th dispersion compensation unit DCU_N , from which it can be detected that the residual dispersion D_{rest} of the optical data signal OS rises virtually uniformly by the prescribed absolute-magnitude dispersion ΔD , and corresponds to the
 35 accumulated residual dispersion D_{akk} after the N th dispersion compensation. The optical data signal OS present at the output E of the N th optical fiber line

MARKEL
 VERSION

1008866-03000

section FDS_N is transmitted to the optical receiver RU
and, if appropriate, subjected to 3R regeneration

10088668-032002

MARKED-UP
VERSION

- not illustrated in Figure 1 - before further processing.

5 A dispersion management scheme DCS according to the invention is illustrated schematically by way of example with the aid of a diagram in Figure 2. It is clear therefrom that the optical transmission system OTS is composed according to the invention of a plurality of optical fiber line sections FDS that in
10 each case have an optical fiber SSMF and a dispersion compensation unit DCF, for example a dispersion compensating fiber. In order to explain the dispersion management scheme DCS according to the invention, the number of the optical fiber line sections is limited to
15 four ($N=4$), such that a first, second, third and fourth optical fiber line section FDS_1 , FDS_2 , FDS_3 , FDS_4 are illustrated in Figure 2, the first optical fiber line section FDS_1 having a first optical fiber $SSMF_1$ and a first optical dispersion compensation unit DCF_1 , the
20 second optical fiber line section FDS_2 having a second optical fiber $SSMF_2$ and a second optical dispersion compensation unit DCF_2 , the third optical fiber line section FDS_3 having a third optical fiber $SSMF_3$ and a third optical dispersion compensation unit DCF_3 , and
25 the fourth optical fiber line section FDS_4 having a fourth optical fiber $SSMF_4$ and a fourth optical dispersion compensation unit DCF_4 . As an example, for the dispersion management scheme DCS of the exemplary embodiment the choice here is a virtually identical
30 length for the first to fourth optical fibers $SSMF_1$ to $SSMF_4$ as well as for the first to fourth dispersion compensating fibers DCF_1 to DCF_4 .

35 The diagram has a horizontal axis (abscissa) x and a vertical axis (ordinate) d , the horizontal axis illustrating the distance x from the optical transmitter TU or the range of the optical data

MARKED-UP
VERSION

10088668.032002

transmission, and the vertical axis d illustrating the
fiber dispersion d in the

200201 89988001

MARKED-UP
VERSION

respective optical fiber SSMF or in the dispersion compensating fiber DCF.

It is clear from Figure 2 that the fiber dispersion of an optical data signal OS present at the input I of the first optical fiber line section FDS₁ rises linearly from the optical transmitter TU (x=0) along the first optical fiber SSMF₁ and assumes a first maximum absolute-magnitude dispersion $D_{\max 1}$ at ^{an} ~~the~~ end ^{x₁} of the first optical fiber ~~x₁~~. The first maximum absolute-magnitude dispersion $D_{\max 1}$ is partially compensated with the aid of the first dispersion compensation unit DCF₁ or the first dispersion compensating fiber, that is to say at ^{an} ~~the~~ end ^{x₂} of the first dispersion compensating fiber ~~x₂~~ there is present a first residual dispersion $D_{\text{rest}1}$ that corresponds at the output E of the first dispersion compensation unit DCF₁ to the absolute-magnitude dispersion ΔD .

Owing to the following second optical fiber SSMF₂, the fiber dispersion d increases from the first residual dispersion $D_{\text{rest}1}$ up to a second maximum ^{an} absolute-magnitude dispersion $D_{\max 2}$ that is present at ~~the~~ end ^{x₃} of the second dispersion compensating fiber ~~x₃~~. The second maximum absolute-magnitude dispersion $D_{\max 2}$ is compensated with the aid of the second dispersion compensation unit DCF₂ or the second dispersion compensating fiber until the second residual dispersion $D_{\text{rest}2}$ corresponds to twice the absolute-magnitude dispersion ΔD , that is to say the remaining residual dispersion D_{rest} rises uniformly per optical fiber line section FDS by the absolute-magnitude dispersion ΔD in each case. Consequently, at ^{an} ~~the~~ end ^{x₄} of the second dispersion compensating fiber ~~x₄~~ a second residual dispersion $D_{\text{rest}2}$ is present which corresponds at the output E of the second dispersion compensation unit or the second dispersion compensating fiber DCF₂ to twice the absolute-magnitude dispersion ΔD .

MARKED-UP
VERSION

200260-89988001

The optical data signal OS transferred by the second dispersion compensating fiber DCF₂ to the third optical fiber SSMF₃ in turn experiences in the third optical fiber SSMF₃

10088668.032002

MARKED-UP
VERSION

signal distortions caused by the fiber dispersion d which assume a third maximum absolute-magnitude dispersion $D_{\max 3}$ at ~~the~~^{an} end ~~of~~ ^{x_5} of the third optical fiber ~~x_5~~ . The third absolute-magnitude dispersion $D_{\max 3}$ is

5 undercompensated by the third optical dispersion compensation unit DCF_3 in such a way that the remaining third residual dispersion $D_{\text{rest}3}$ corresponds to three times the absolute-magnitude dispersion ΔD according to the invention, that is to say at ~~the~~^{an} end ~~of~~ ^{x_6} of the third

10 dispersion compensating fiber ~~x_6~~ the residual dispersion D_{rest} assumes a third residual dispersion $D_{\text{rest}3}$, which has increased once more by the absolute-magnitude dispersion ΔD by comparison with the second residual dispersion $D_{\text{rest}2}$.

15 Furthermore, the optical data signal OS present at the output E of the third dispersion compensating fiber DCF_3 is transferred to the fourth and last optical fiber $SSMF_4$ of the optical transmission system OTS. It

20 becomes clear with the aid of Figure 2 that the fiber dispersion d continues to increase, and has a fourth maximum absolute-magnitude dispersion $D_{\max 4}$ at ~~the~~^{an} end ~~of~~ ^{x_7} of the fourth optical fiber ~~x_7~~ . With the aid of the fourth dispersion compensation unit DCF_4 , the fourth

25 maximum absolute-magnitude dispersion $D_{\max 4}$ is reduced to the absolute magnitude of the accumulated residual dispersion D_{akk} , which corresponds to four times the absolute-magnitude dispersion ΔD according to the invention. The remaining residual dispersion D_{rest} of

30 the optical transmission system OTS thereby has the absolute magnitude of the accumulated residual dispersion D_{akk} at ~~the~~^{an} end ~~of~~ ^{x_8} of the optical transmission link or at the end of the fourth fiber line section ~~x_8~~ .

35 The transmission range x_8 that can be bridged without regeneration is virtually doubled by the uniform "splitting up" according to the invention of the accumulated residual dispersion D_{akk} calculated or

MARKED-UP
VERSION

10088558 032002
2002E0 3998300T

estimated for the respective optical transmission system OTS into a fixed number of fiber line sections FDS. Here, the fiber line sections FDS of the optical transmission system are undercompensated as a function
5 of the length of the respective optical fiber SSMF as far in each case as a residual dispersion D_{rest} fixed by the accumulated

2002E0" 8993300T

MARKED-UP
VERSION

residual dispersion D_{akk} , the residual dispersion D rising from fiber line section FDS_1 to fiber line section FDS_2 by the same absolute-magnitude dispersion in each case.

5

By comparison with a dispersion management scheme DCS that fully compensates the respective fiber line section FDS of an optical transmission system OTS, the dispersion management scheme DCS of the distributed undercompensation according to the invention can substantially increase the range that can be bridged without regeneration, which leads to a saving of cost-intensive electric 3R regeneration devices.

Moreover, it is possible to implement a bidirectional data transmission over the fiber line sections FDS considered in a simple way on the basis of the symmetrical design, to be seen in Figure 2, of the optical transmission system OTS.

20

In addition, a fiber line section FDS having an optical fiber SSMF and a dispersion compensation unit DCF can be configured as an optical transmission module M. Consequently, the optical transmission system OTS can be formed by a series circuit of such optical transmission modules M. Such a modular design substantially facilitates in practice the implementation of an optical transmission link or the extension of an existing optical transmission link.

30

Furthermore, the use of the distributed undercompensation according to the invention is particularly advantageous in the case of optical transmission systems that, because of the data transmission with the aid of a plurality of transmission channels, have a strong cross-phase modulation (XPM) as regards the effect limiting the transmission

35

MARKED-UP
VERSION

10088668-032002
20020808 080808

ranges that can be bridged without regeneration. This strong cross-phase modulation (XPM)

10088658.032002

MARKED-UP
VERSION

- can be suppressed by means of the provision according to the invention of a slight, local residual dispersion D_{rest} at the end of a fiber line section FDS. Consequently, not only is the self-phase modulation (SPM) suppressed by the distributed undercompensation according to the invention, but the influence of the cross-phase modulation (XPM) is substantially reduced virtually simultaneously.
- 10 The number of the compensated fiber line sections n_{fs} that can be bridged without regeneration is illustrated in a further diagram in Figure 3 as a function of the distributed under- or overcompensation ^{uoc}~~uoc~~ for different input powers P4dBm, P6dBm, P9dBm, P12dBm, 15 P15dBm of the optical data signal OS.

- The further diagram has a horizontal axis (abscissa) ^{uoc} and a vertical axis (ordinate) ~~nfs~~ ^{nfs}, the horizontal axis ^{uoc} illustrating the "under- or overcompensation" scheme, provided for the dispersion compensation, of 20 the optical transmission system OTS, and the vertical axis ^{spans or fiber} ~~nfs~~ illustrating the number of the compensated fiber line sections ^{FDS} ~~FDS~~ of the optical transmission system OTS. It may also be seen that the uniform 25 undercompensation according to the invention of the plurality of fiber line sections FDS permits an increase in the transmission range that can be bridged without regeneration. The transmission range that can be bridged without regeneration is illustrated in the 30 further diagram by the number of the compensated fiber line sections FDS of the optical transmission system OTS.

- For this purpose, a first to fifth optical data signal 35 OS1 to OS5 is fed to an optical test transmission system OTS that has a different input power P in each case. Here, the first optical data signal OS1 has an input power of 4dBm, the second optical data signal OS2

small
letters

10088866 "03200"

MARKED-UP
VERSION

an input power of 6dBm, the third optical data signal
OS3 an input power of 9dBm, the fourth op-

2002ED" 8998800T

MARKED-UP
VERSION

tical data signal OS4 an input power of 12dBm, and the fifth optical data signal OS5 an input power of 15dBm.

5 The increase in the transmission range that can be bridged without regeneration is particularly clear on the profile of the curve for the first optical data signal OS1, since the first optical data signal OS1 can be transmitted without regeneration over virtually 120 fiber line sections FDS in the case of an
10 undercompensation of approximately 0.5 km of a standard monomode fiber (SSMF). In this case, the respective fiber line section FDS is respectively compensated by the dispersion compensating fiber DCF to such an extent that a residual dispersion D_{rest} is present that
15 corresponds to an uncompensated optical fiber length of half a kilometer (0.5 km).

MARKED-UP
VERSION

10088663-03200
2002E0-39988001

~~Patent claims~~

We claim:

1. An optical transmission system (OTS) comprising a fixed number (N) of optical fiber line sections (FDS₁ to FDS₄) of virtually the same length with in each case an optical fiber (SSMF₁ to SSMF₄) and a dispersion compensation unit (DCF₁ to DCF₄), characterized in that the dispersion compensation units (DCF₁ to DCF₄) have virtually the same compensation values, which are determined starting from a calculated or estimated accumulated residual dispersion (D_{akk}) for an at least virtually uniformly distributed undercompensation of the fiber dispersion (d) of the fixed number (N) of optical fiber line sections (FDS₁ to FDS₄).
2. The optical transmission system as claimed in claim 1, characterized in that the dispersion compensation units (DCF₁ to DCF₄) are provided for compensating the fiber dispersion (d) of all the optical fiber line sections (FDS₁ to FDS₄).
3. The optical transmission system as claimed in one of claims 1 or 2, characterized in that a fiber line section (FDS₁) having an optical fiber (SSMF₁) and a dispersion compensation unit (DCF₁) implements an optical transmission module (M).
4. The optical transmission system as claimed in claim 3, characterized in that the optical transmission system (OTS) can be formed from a plurality of optical transmission modules (M) arranged in series.

MARKED-UP
VERSION

AMENDED SHEET

10088666.032002

~~Optical transmission system~~

5

The invention relates to ~~an~~ ^{has} optical transmission system (OTS) ~~comprising~~ a plurality of optical fiber line sections ~~(FDS)~~ with ~~in~~ ^{section including} each ~~case~~ an optical fiber (SSMF) and a dispersion compensation unit (DCF). ~~in the~~ ^{The} case of which dispersion compensation units (DCF) are provided ~~that~~ ^{to} compensate ~~the~~ ^{for} the fiber dispersion (d) of a plurality of fiber line sections (FDS₁ to FDS_n) in such a way that the remaining residual dispersion ~~(D_{rest})~~ ^{per} compensated fiber line section (FDS₁ to FDS_n) ~~occurs~~ ^{arises} at least virtually uniformly by the same absolute-magnitude dispersion (ΔD) ~~in each case.~~

~~Figure 2~~

**MARKED-UP
VERSION**